


BOW AND ARROW Playfield Chart

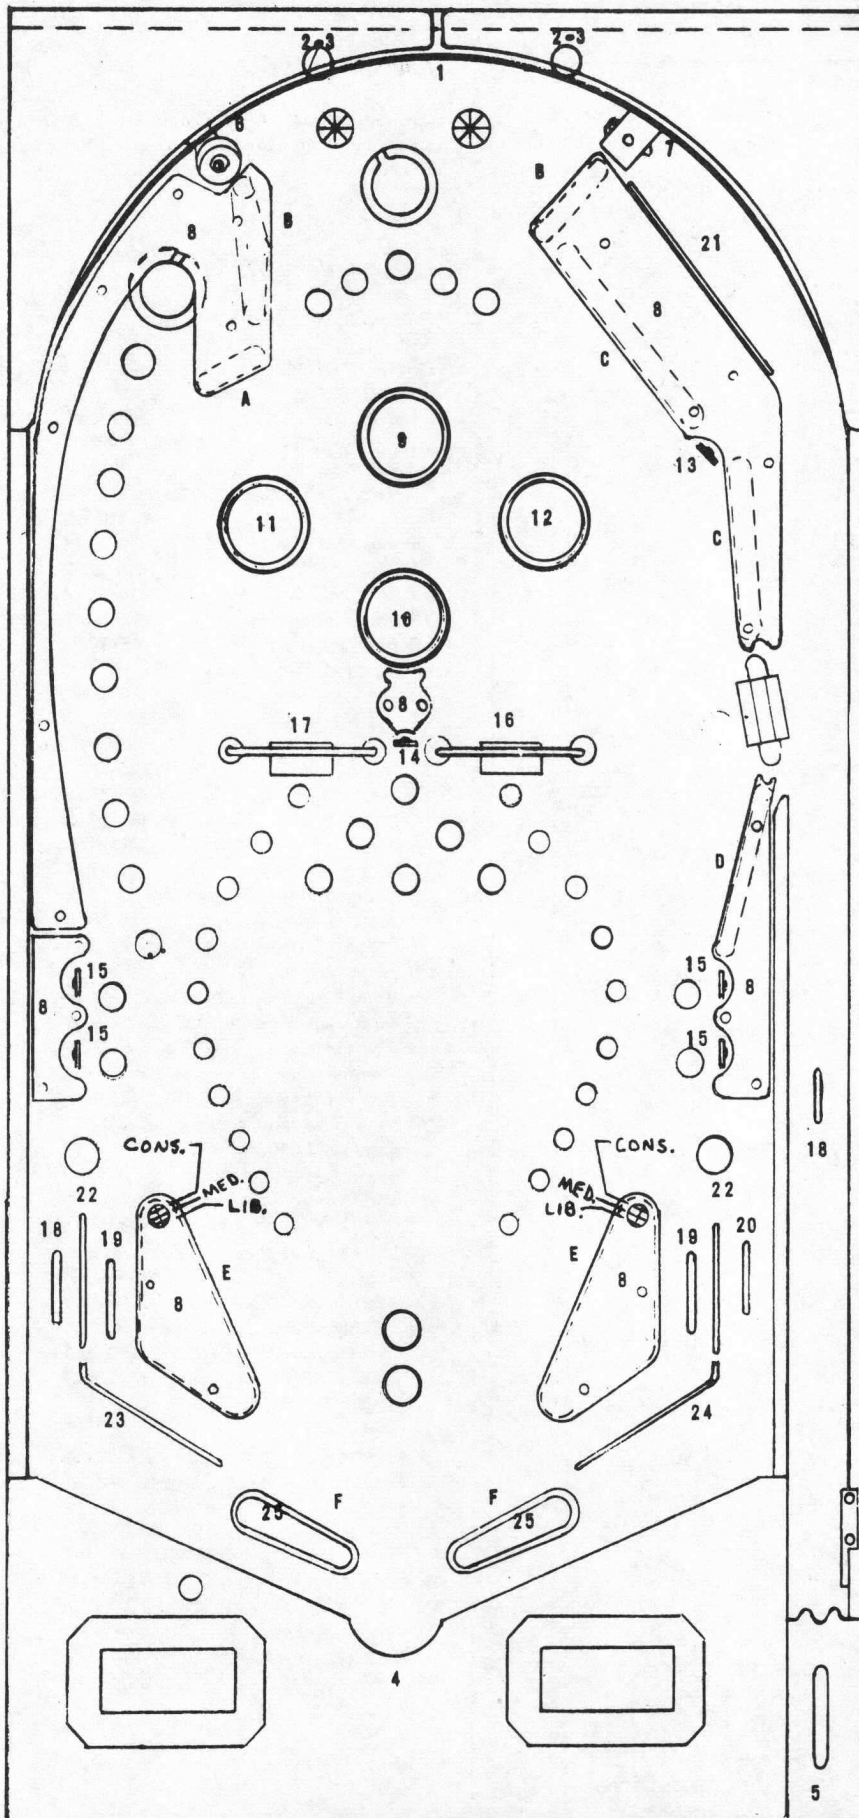

RUBBER PARTS

Dimensions are inside diameters. Numbers in parentheses indicate quantity used, if in excess of one.

- A R-521-1, 1 in.
- B R-521-2, 1-1/2 in. (2)
- C R-521-3, 2 in. (2)
- D R-521-4, 2-1/2 in.
- E R-521-5, 3 in. (2)
- F R-406-3 (Flipper) (2)

PARTS

- 1 Arch Rail M-1774
- 2 Rail Post C-907
- 3 Rail Post Cap C-908
- 4 Bottom Arch P-5871-48
- 5 Shooter Gauge P-6359-14
- 6 Rebound Assy. AS-493-6
Detailed item 8, page 125
- 7 Ball Gate A-1475-9
- 8 Screened Plastics (set) ... A-2890-110
- 9 Bumper Cap A A-3713-1
- 10 Bumper Cap B A-3713-2
- 11 Bumper Cap C A-3713-3
- 12 Bumper Cap D A-3713-4
Bumpers detailed, page 167
- 13 Target Assy., red AS-982-752
Detailed item 23, page 125
- 14 Target Assy., yellow AS-982-807
Detailed item 22, page 137
- 15 Target Assy., green (4) ... AS-982-813
Bracket P-126-427
Switch Plate
Flat P-126-155
Spring P-137-5
Target Switch Assy. A-3359-6
- 16 Spinner Gate, right AS-2250-34
Detailed, item 20, page 147
- 17 Spinner Gate, left AS-2250-35
Detailed, item 21, page 147
- SPINNER Relay,
Single Relay, Playfield Panel,
BOW AND ARROW, page 79
- Spinner Switch (2) ASW-A1-130
Spinner Unit, page 109
- 18 Rollover Wire Assy. AS-2806-2
Detailed, item 12, page 146
- 19 Rollover Wire Assy. (2) ... AS-2806
Detailed, item 13, page 146
- 20 Rollover Wire Assy. AS-2806-1
Bracket P-6254-1
Wire M-1336-1
- 21 Guide Wire M-121-34
- 22 Guide Wire (2) M-121-18
- 23 Guide Wire M-121-43
- 24 Guide Wire M-121-44
- 25 Flipper & Shaft AS-2214-24
Flippers detailed, page 175

⊕ INDICATES MOVABLE POSTS
FOR ADJUSTMENT;
CONSERVATIVE — +
MEDIUM — +
LIBERAL — +